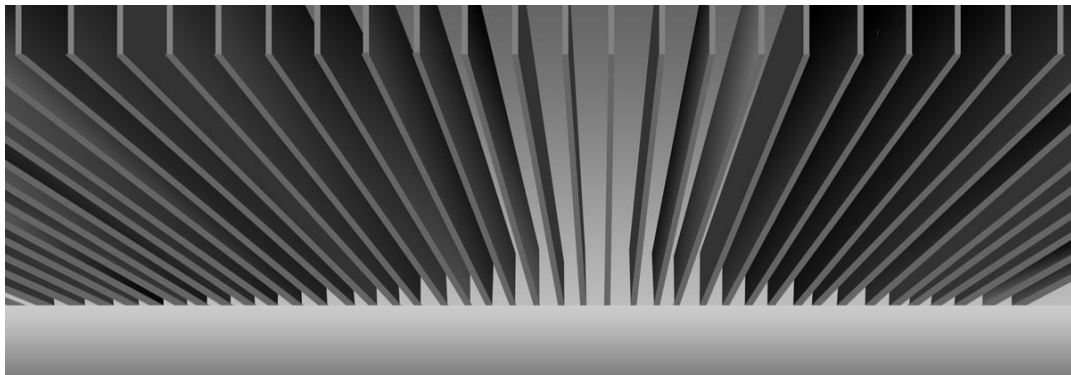
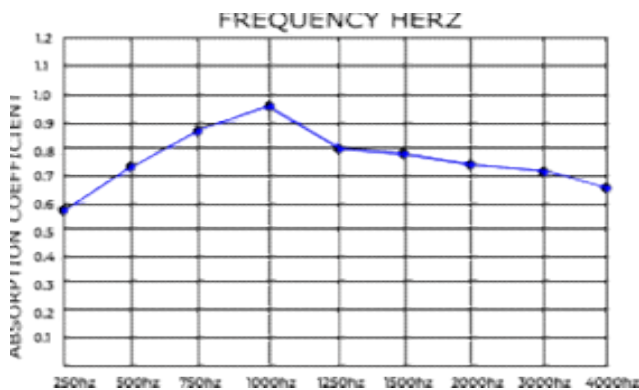


SYSTEM	BRAND	TYPE OF PRODUCT	TECHNICAL SPECIFICATION	SOUND ABSORPTION	RECOMMENDED AREAS
Wall Fixed Acoustic Panels		Live Creative: Double Sided Poly Fibre Fins (Blades): LPVDS-5480	Live Creative - Poly Fibre Fins [Blades]: LPVDS-5480 This tackable substrate offers moderate acoustical properties. The Live Creative - Poly Fibre Fins (Blades) or Vertical Doubles Sided is constructed with inorganic minerals and fibres making it resistant to moisture and warping. The Poly Fibre Panel is a dense material recommended for office areas, passages, and lobbies. The Poly Fibre Panel is constructed with inorganic minerals and fibres making it resistant to moisture and warping. The Square Panel is 24mm deep. The poly fibre panel a dense material recommended for office areas.	Frequency Table 250Hz - 0.59 315Hz - 0.73 400Hz - 0.89 500Hz - 0.96 630Hz - 0.79 800Hz - 0.74 1000Hz - 0.80 1250Hz - 0.71 1600Hz - 0.66 NRC - 0.76	Architectural Ideal for High Traffic Areas. Homes, Home Cinema Rooms, Offices, Meeting Rooms, Board Rooms Hotels, Community Halls, Restaurants Schools, Auditoriums, Courtrooms, Music studios and rehearsal spaces, auditoriums. Installation Suspend off the existing slab or ceiling using a stainless steel cable fixing kit. Ideal suspended height between 2700mm to 3500mm from the floor Installed according to manufacturer's installation guidelines .
					
FREQUENCY ABSORPTION COEFFICIENT			PHOTO	SIZE, THICKNESS AND MATERIALS	SPECIFICATIONS
				Acoustic poly fibre wall panels – are 24mm thick. Recommended Min: 1200 x 600 x 35mm (2x fixing/panel), Recommended Max: 2400 x 600 x 35mm (3x fixing/panel) Various sizes in between the min & max.	Fire Classification Class B fire (ASTM E84) Suitable for use in areas with relative humidity (up to 65%)