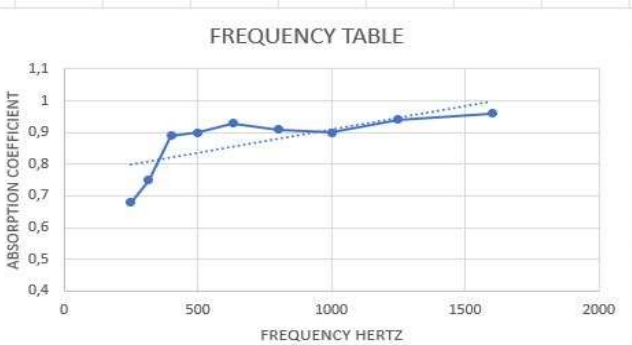
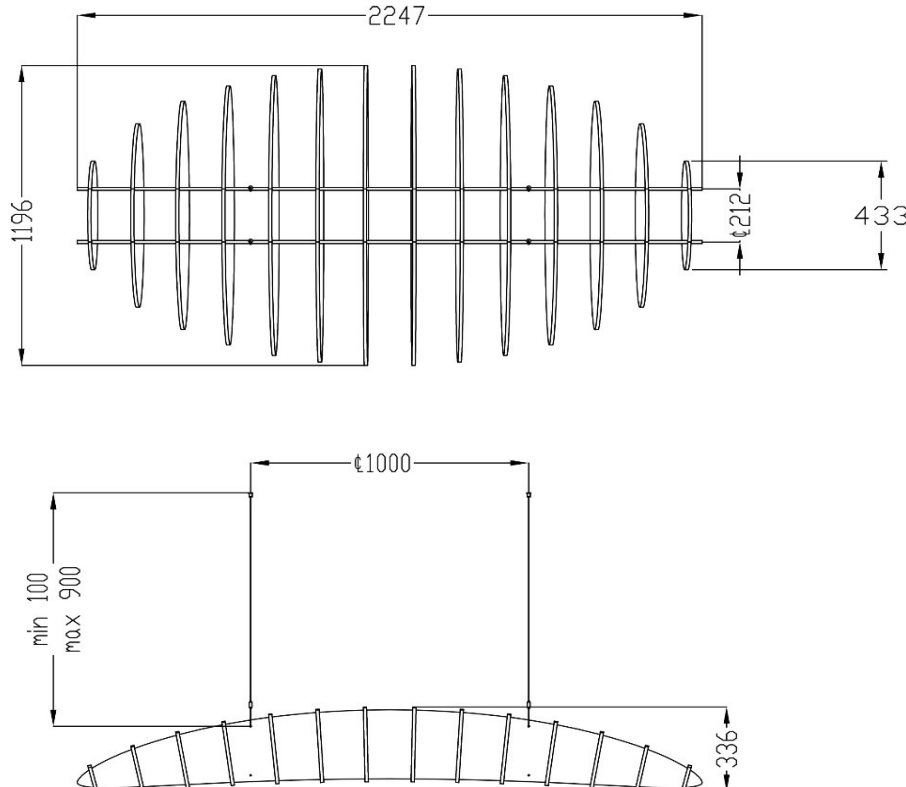
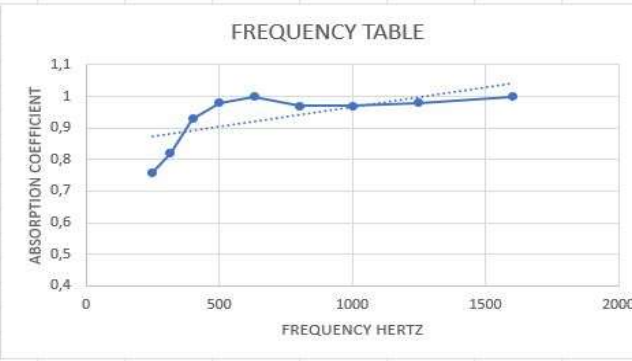
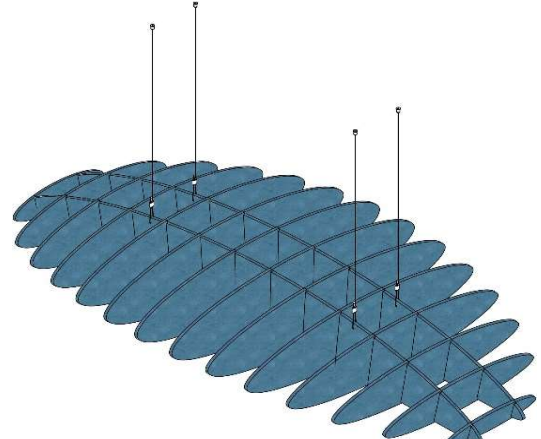


SYSTEM	BRAND	TYPE OF PRODUCT	TECHNICAL SPECIFICATION	SOUND ABSORPTION	RECOMMENDED AREAS																														
Ceiling Acoustic Panels (Rafts)		Live Diffraction: Poly Fibre Acoustic Oblique Raft: LDSPFOR-1819	Live Diffraction - Poly Fibre Acoustic Oblique Raft: LDSPFOR-1819 Our light weight acoustic diffraction ceiling rafts delivers excellent acoustic performance. The grid design allows for the absorption of echo and reverberation. The raft suspension heights can be adjusted to target variable acoustic frequencies. They are easy to install and are available in various designs and solid colours. 	Frequency Table Suspended 100mm off slab/ceiling <table><tr><td>250Hz</td><td>-</td><td>0.68</td></tr><tr><td>315Hz</td><td>-</td><td>0.75</td></tr><tr><td>400Hz</td><td>-</td><td>0.89</td></tr><tr><td>500Hz</td><td>-</td><td>0.90</td></tr><tr><td>630Hz</td><td>-</td><td>0.93</td></tr><tr><td>800Hz</td><td>-</td><td>0.91</td></tr><tr><td>1000Hz</td><td>-</td><td>0.90</td></tr><tr><td>1250Hz</td><td>-</td><td>0.94</td></tr><tr><td>1600Hz</td><td>-</td><td>0.96</td></tr><tr><td>NRC</td><td>-</td><td>0.87</td></tr></table>	250Hz	-	0.68	315Hz	-	0.75	400Hz	-	0.89	500Hz	-	0.90	630Hz	-	0.93	800Hz	-	0.91	1000Hz	-	0.90	1250Hz	-	0.94	1600Hz	-	0.96	NRC	-	0.87	Architectural Ideal for Open Plan Office areas, Meeting Rooms, Breakaway Huddle spaces Hotels, Community Halls, Restaurants, Schools and Canteens Installation Direct fix or suspended off the existing slab or ceiling using fixing clips or stainless steel cable kits. Ideal suspended height 400mm off the slab or ceiling Installed according to manufacturer's installation guidelines
250Hz	-	0.68																																	
315Hz	-	0.75																																	
400Hz	-	0.89																																	
500Hz	-	0.90																																	
630Hz	-	0.93																																	
800Hz	-	0.91																																	
1000Hz	-	0.90																																	
1250Hz	-	0.94																																	
1600Hz	-	0.96																																	
NRC	-	0.87																																	
FREQUENCY ABSORPTION COEFFICIENT				SIZE, THICKNESS AND MATERIALS	SPECIFICATIONS																														
				Area Coverage is approximately 2400mm x 1200mm: 100% Polyester fibre suspended ceiling rafts. The maximum length of the 2x support spines is 2247mm The maximum length of the centre fin is 1196mmX 336mm high tapering to a min length of 433mm Each fin is 18mm thick.	Fire Classification Class A fire (ASTM E84) Suitable for use in areas with relative humidity (up to 65%)																														
																																			

SYSTEM	BRAND	TYPE OF PRODUCT	TECHNICAL SPECIFICATION	SOUND ABSORPTION	RECOMMENDED AREAS																														
Ceiling Acoustic Panels (Rafts)		Live Diffraction: Poly Fibre Acoustic Oblique Raft: LDSPFOR-1819	Live Diffraction - Poly Fibre Acoustic Oblique Raft: LDSPFOR-1819 	Frequency Table Suspended 400mm off slab/ceiling <table><tr><td>250Hz</td><td>-</td><td>0.76</td></tr><tr><td>315Hz</td><td>-</td><td>0.82</td></tr><tr><td>400Hz</td><td>-</td><td>0.93</td></tr><tr><td>500Hz</td><td>-</td><td>0.98</td></tr><tr><td>630Hz</td><td>-</td><td>1.00</td></tr><tr><td>800Hz</td><td>-</td><td>0.97</td></tr><tr><td>1000Hz</td><td>-</td><td>0.97</td></tr><tr><td>1250Hz</td><td>-</td><td>0.98</td></tr><tr><td>1600Hz</td><td>-</td><td>1.00</td></tr><tr><td>NRC</td><td>-</td><td>0.93</td></tr></table>	250Hz	-	0.76	315Hz	-	0.82	400Hz	-	0.93	500Hz	-	0.98	630Hz	-	1.00	800Hz	-	0.97	1000Hz	-	0.97	1250Hz	-	0.98	1600Hz	-	1.00	NRC	-	0.93	Architectural Ideal for Open Plan Office areas, Meeting Rooms, Breakaway Huddle spaces Hotels, Community Halls, Restaurants, Schools and Canteens Installation Direct fix or suspended off the existing slab or ceiling using fixing clips or stainless steel cable kits. Ideal suspended height 400mm off the slab or ceiling Installed according to manufacturer's installation guidelines
250Hz	-	0.76																																	
315Hz	-	0.82																																	
400Hz	-	0.93																																	
500Hz	-	0.98																																	
630Hz	-	1.00																																	
800Hz	-	0.97																																	
1000Hz	-	0.97																																	
1250Hz	-	0.98																																	
1600Hz	-	1.00																																	
NRC	-	0.93																																	
FREQUENCY ABSORPTION COEFFICIENT			PHOTO	SIZE, THICKNESS AND MATERIALS	SPECIFICATIONS																														
				Area Coverage is approximately 2400mm x 1200mm: 100% Polyester fibre suspended ceiling rafts. The maximum length of the 2x support spines is 2247mm The maximum length of the centre fin is 1196mmX 336mm high tapering to a min length of 433mm Each fin is 18mm thick.	Fire Classification Class A fire (ASTM E84) Suitable for use in areas with relative humidity (up to 65%)																														