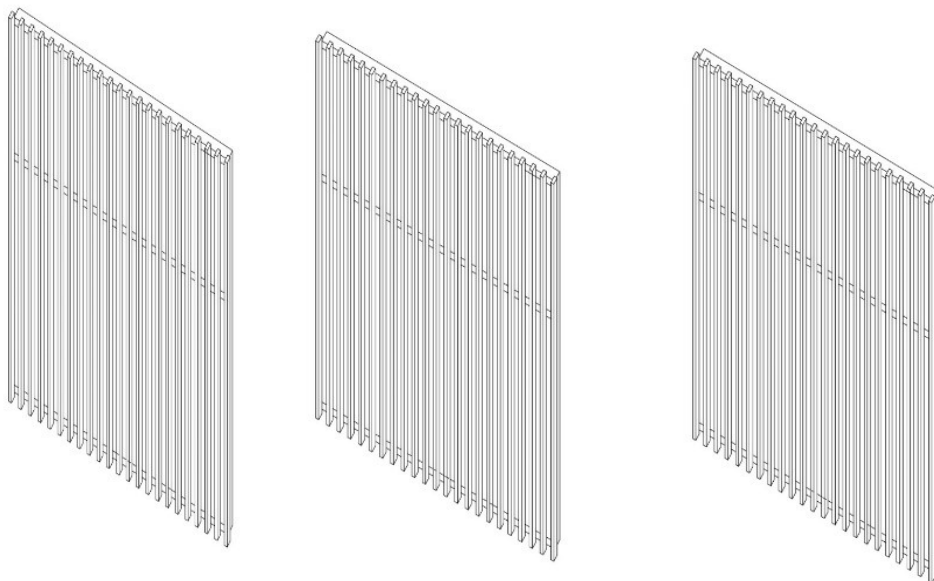
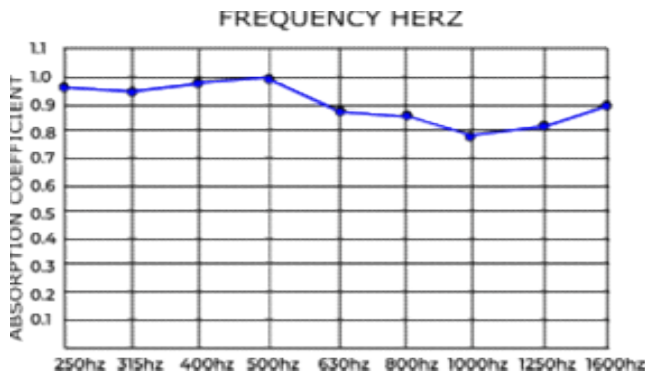


SYSTEM	BRAND	TYPE OF PRODUCT	TECHNICAL SPECIFICATION	SOUND ABSORPTION	RECOMMENDED AREAS	
Wall Fixed Acoustic Panels		Live Timber Slatted Panels: ALWS-44570	Live Timber - Slatted Acoustic Panel: ALWS-44570 This tackable substrate offers moderate acoustical properties. The Live Timber - Slatted Acoustic Panel: ALWS-44570 is constructed with inorganic minerals and fibres making it resistant to moisture and warping. Live Timber - Slatted Acoustic Panel: ALWS-44570 is a dense material recommended for office areas, passages, and lobbies.	Frequency Table 250Hz - 0.96 315Hz - 0.95 400Hz - 0.99 500Hz - 1.00 630Hz - 0.88 800Hz - 0.86 1000Hz - 0.78 1250Hz - 0.83 1600Hz - 0.92 NRC - 0.79	Architectural Ideal for High Traffic Areas. Homes, Offices, Meeting Rooms, Board Rooms, Hotels, Community Halls, Restaurants, Schools, Auditoriums, Courtrooms, Home theatre rooms, Music studios and rehearsal spaces. Installation The panels are fixed directly to the wall. Installed according to manufacturer's installation guidelines.	
						
FREQUENCY ABSORPTION COEFFICIENT				PHOTO	SIZE, THICKNESS AND MATERIALS	SPECIFICATIONS
					Maximum Recommended dimensions 2400mm x 1200mm Timber slatted wall panels – are 100mm thick including the wood framework with various layered acoustic materials .	Fire Classification Class B fire (ASTM E84) Suitable for use in areas with relative humidity (up to 65%)