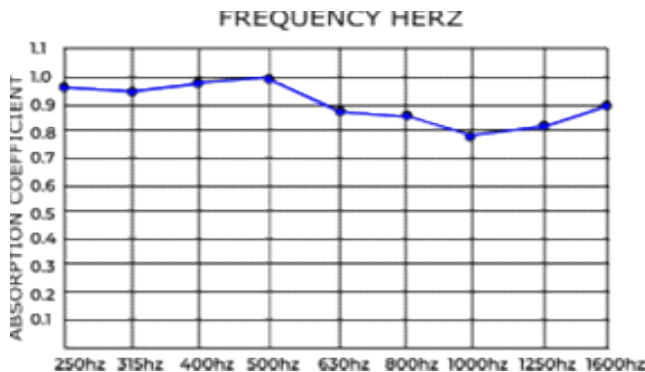


SYSTEM	BRAND	TYPE OF PRODUCT	TECHNICAL SPECIFICATION	SOUND ABSORPTION	RECOMMENDED AREAS																														
Ceig Fixed Acoustic Baffle		Live Timber Slatted Acoustic Baffle: ALWS-44571	Live Timber - Slatted Acioustic Baffle: ALWS-44571 This tackable substrate offers moderate acoustical properties. The Live Timber - Slatted Acioustic Baffle: ALWS-44571 is constructed with inorganic minerals and fibres making it resistant to moisture and warping. Live Timber - Slatted Acioustic Baffle: ALWS-44571 is a dense material recommended for office areas, passages, and lobbies etc. 	Frequency Table <table><tr><td>250Hz</td><td>-</td><td>0.96</td></tr><tr><td>315Hz</td><td>-</td><td>0.95</td></tr><tr><td>400Hz</td><td>-</td><td>0.99</td></tr><tr><td>500Hz</td><td>-</td><td>1.00</td></tr><tr><td>630Hz</td><td>-</td><td>0.88</td></tr><tr><td>800Hz</td><td>-</td><td>0.86</td></tr><tr><td>1000Hz</td><td>-</td><td>0.78</td></tr><tr><td>1250Hz</td><td>-</td><td>0.83</td></tr><tr><td>1600Hz</td><td>-</td><td>0.92</td></tr><tr><td>NRC</td><td>-</td><td>0.79</td></tr></table>	250Hz	-	0.96	315Hz	-	0.95	400Hz	-	0.99	500Hz	-	1.00	630Hz	-	0.88	800Hz	-	0.86	1000Hz	-	0.78	1250Hz	-	0.83	1600Hz	-	0.92	NRC	-	0.79	Architectural Ideal for High Traffic Areas. Homes, Offices, Meeting Rooms, Board Rooms Hotels, Community Halls, Restaurants Schools, Auditoriums, Courtrooms Home theatre rooms Music studios and rehearsal spaces. Installation The baffles are either attached to the ceiling directly or suspended from the ceiling with cables. Installed according to manufacturer's installation guidelines.
250Hz	-	0.96																																	
315Hz	-	0.95																																	
400Hz	-	0.99																																	
500Hz	-	1.00																																	
630Hz	-	0.88																																	
800Hz	-	0.86																																	
1000Hz	-	0.78																																	
1250Hz	-	0.83																																	
1600Hz	-	0.92																																	
NRC	-	0.79																																	
FREQUENCY ABSORPTION COEFFICIENT				SIZE, THICKNESS AND MATERIALS	SPECIFICATIONS																														
				Maximum Recommended dimensions 2400mm x 1200mm Timber slatted ceiling baffles – are 100mm thick including the wood framework with various layered acoustic materials .	Fire Classification Class B fire (ASTM E84) Suitable for use in areas with relative humidity (up to 65%)																														