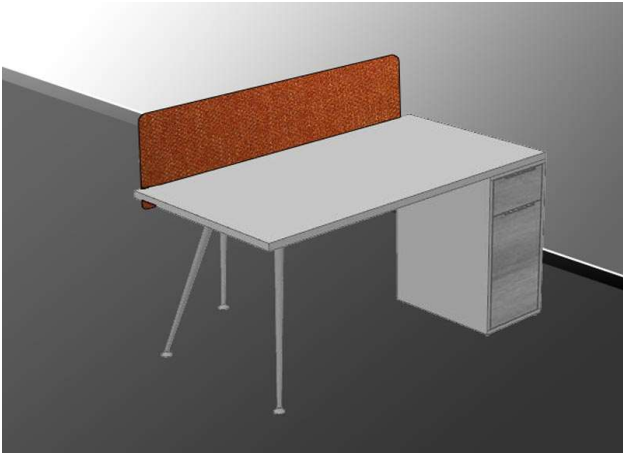
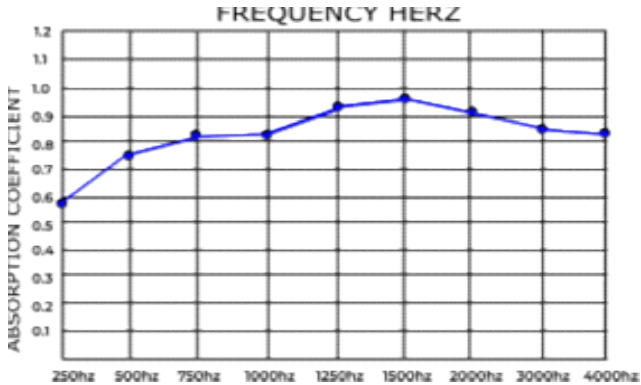
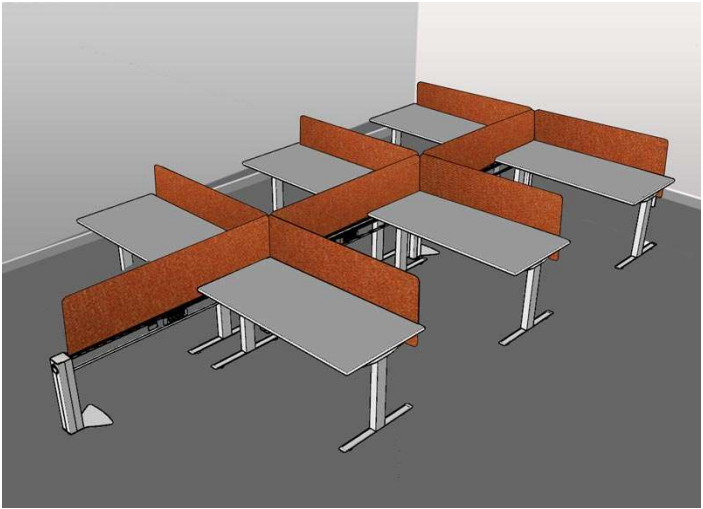


SYSTEM	BRAND	TYPE OF PRODUCT	TECHNICAL SPECIFICATION	SOUND ABSORPTION	RECOMMENDED AREAS
Desk Acoustic Screens		Live Textile Desk Screen DSR-1700 For 1800 Desk	Live Textile - Desk Based Screen DSR-1700 for 1800 Desk This tackable substrate offers moderate acoustical properties. The Live Textile - Desk Based Screen DSR-1700 for 1800 Desk is constructed with inorganic minerals and fibres making it resistant to moisture and warping. The Live Textile - Desk Based Screen DSR-1700 for 1800 Desk is a dense material recommended for offices. Live Textile - Desk Based Screen DSR-1700 for 1800 Desk are the perfect solution to reduce problems with noise including other unwanted sound in indoor office environments. 	Frequency Table 250Hz - 0.57 315Hz - 0.74 400Hz - 0.82 500Hz - 0.81 630Hz - 0.93 800Hz - 0.97 1000Hz - 0.92 1250Hz - 0.84 1600Hz - 0.82 NRC - 0.74	Architectural Ideal for High Traffic Areas. Homes, Home Cinema Rooms, Offices, Meeting Rooms, Board Rooms Hotels, Community Halls, Restaurants Schools, Auditoriums, Courtrooms, Music studios and rehearsal spaces, auditoriums. Installation The Screens are simple to mount on the desks, are customizable by color to fit the project's look and feel. The Screens are Mounted onto desks from brackets. Installed according to manufacturer's installation guidelines.
FREQUENCY ABSORPTION COEFFICIENT			PHOTO	SIZE, THICKNESS AND MATERIALS	SPECIFICATION FOR HANGING
				Recommended 1700mm x (450mm - 600mm) Acoustic wall panels – 40mm thick, MDF framework with various layered acoustic materials upholstered in acoustic printed fabric.	Fire Classification Class B fire (ASTM E84) Suitable for use in areas with relative humidity (up to 65%)