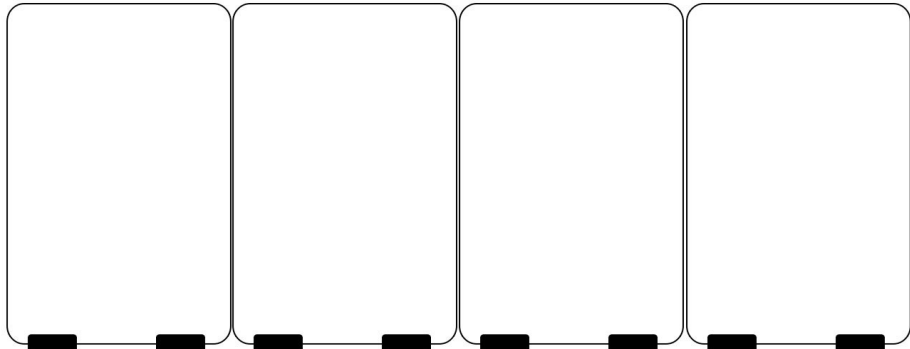
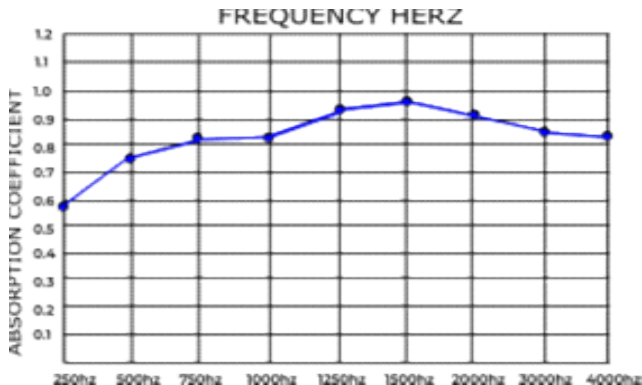
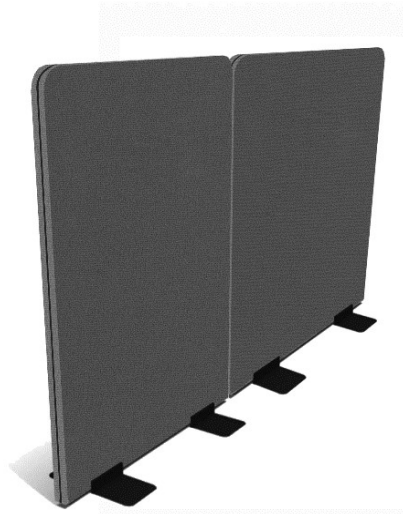


SYSTEM	BRAND	TYPE OF PRODUCT	TECHNICAL SPECIFICATION	SOUND ABSORPTION	RECOMMENDED AREAS
Floor Acoustic Screens		Live Textile Floor Based Screen FSR-18900	Live Textile - Floor Based Screen: FSR-18900 This tackable substrate offers moderate acoustical properties. The Live Textile - Floor Based Screen: FSR-18900 is constructed with inorganic minerals and fibres making it resistant to moisture and warping. The Live Textile - Floor Based Screen: FSR-18900 is a dense material recommended for office areas, passages, and lobbies. Live Textile - Floor Based Screen: FSR-18900 are the perfect solution to reduce problems with noise including other unwanted sound in all types of indoor environments.	Frequency Table 250Hz - 0.57 315Hz - 0.74 400Hz - 0.82 500Hz - 0.81 630Hz - 0.93 800Hz - 0.97 1000Hz - 0.92 1250Hz - 0.84 1600Hz - 0.82 NRC - 0.74	Architectural Ideal for High Traffic Areas. Homes, Home Cinema Rooms, Offices, Meeting Rooms, Board Rooms Hotels, Community Halls, Restaurants Schools, Auditoriums, Courtrooms, Music studios and rehearsal spaces, auditoriums. Installation The Free Standing Floor Screen Screens are easy to position on the floor in multi arrangement possibilities. The Screens are also customizable by color and size to fit your next project's look and feel.
					
FREQUENCY ABSORPTION COEFFICIENT			PHOTO	SIZE, THICKNESS AND MATERIALS	SPECIFICATION FOR HANGING
				Recommended 1800mm x 900mm Acoustic wall panels – 40mm thick, MDF framework with various layered acoustic materials upholstered in acoustic printed fabric.	Fire Classification Class B fire (ASTM E84) Suitable for use in areas with relative humidity (up to 65%)