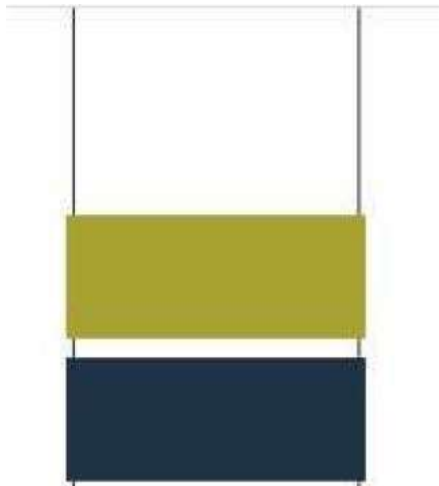
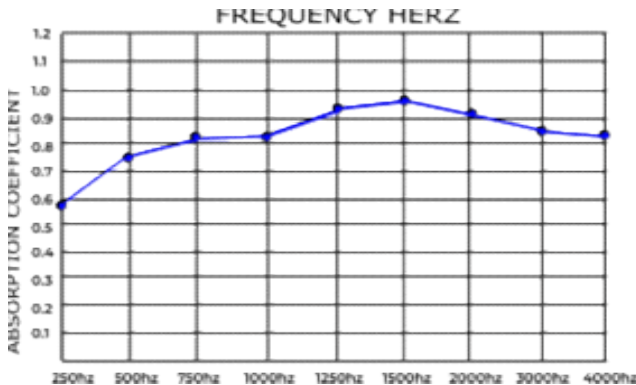


SYSTEM	BRAND	TYPE OF PRODUCT	TECHNICAL SPECIFICATION	SOUND ABSORPTION	RECOMMENDED AREAS																														
Ceiling Fixed Acoustic Screens		Live Textile Hanging Screen HSR-045D	Live Textile - Hanging Screen: HSR-045D This tackable substrate offers moderate acoustical properties. The Live Textile - Hanging Screen: HSR-045D is constructed with inorganic minerals and fibres making it resistant to moisture and warping. The Live Textile - Hanging Screen: HSR-045D is a dense material recommended for office areas, passages, and lobbies. Live Textile - Hanging Screen: HSR-045D are the perfect solution to reduce problems with noise including other unwanted sound in all types of indoor environments. 	Frequency Table <table><tr><td>250Hz</td><td>-</td><td>0.57</td></tr><tr><td>315Hz</td><td>-</td><td>0.74</td></tr><tr><td>400Hz</td><td>-</td><td>0.82</td></tr><tr><td>500Hz</td><td>-</td><td>0.81</td></tr><tr><td>630Hz</td><td>-</td><td>0.93</td></tr><tr><td>800Hz</td><td>-</td><td>0.97</td></tr><tr><td>1000Hz</td><td>-</td><td>0.92</td></tr><tr><td>1250Hz</td><td>-</td><td>0.84</td></tr><tr><td>1600Hz</td><td>-</td><td>0.82</td></tr><tr><td>NRC</td><td>-</td><td>0.74</td></tr></table>	250Hz	-	0.57	315Hz	-	0.74	400Hz	-	0.82	500Hz	-	0.81	630Hz	-	0.93	800Hz	-	0.97	1000Hz	-	0.92	1250Hz	-	0.84	1600Hz	-	0.82	NRC	-	0.74	Architectural Ideal for High Traffic Areas. Homes, Home Cinema Rooms, Offices, Meeting Rooms, Board Rooms Hotels, Community Halls, Restaurants Schools, Auditoriums, Courtrooms, Music studios and rehearsal spaces, auditoriums Installation The Screens are simple to hang and are customizable by color and size to fit your next project's look and feel. The Screens are Suspended from cables attached to the ceiling. Installed according to manufacturer's installation guidelines
250Hz	-	0.57																																	
315Hz	-	0.74																																	
400Hz	-	0.82																																	
500Hz	-	0.81																																	
630Hz	-	0.93																																	
800Hz	-	0.97																																	
1000Hz	-	0.92																																	
1250Hz	-	0.84																																	
1600Hz	-	0.82																																	
NRC	-	0.74																																	
FREQUENCY ABSORPTION COEFFICIENT			PHOTO	SIZE, THICKNESS AND MATERIALS	SPECIFICATIONS																														
				Recommended (900mm, 1200mm, 1600mm, 1800mm) x 450mm Acoustic wall panels – 40mm thick, MDF framework with various layered acoustic materials upholstered in acoustic printed fabric.	Fire Classification Class B fire (ASTM E84) Suitable for use in areas with relative humidity (up to 65%)																														