


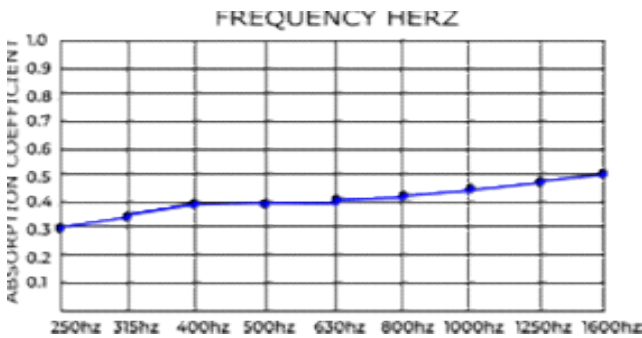


SYSTEM	BRAND	TYPE OF PRODUCT	TECHNICAL SPECIFICATION	SOUND ABSORPTION	RECOMMENDED AREAS
Wall Fixed Acoustic Panels		Live Textile Right Triangle Panel: LRTP-5490	Live Textile - Right Triangle Panel LRTP-5490 This tackable substrate offers moderate acoustical properties. The Live Right Triangle Panel is constructed with inorganic minerals and fibres making it resistant to moisture and warping. The Square Panel is a dense material recommended for office areas, passages, and lobbies. It is available in 20mm thickness. Fabric Acoustic Panels or Noise Reduction Panels are commonly used in home theatres or home cinemas, recording studios, engineering booths, restaurants, lobbies, bars and cafes, coffee houses, libraries, schools, universities, conference rooms, office buildings, courtrooms, apartment complexes, studio designs, home decor etc for noise reduction. Live Textile – Fabric Acoustic Panels are the perfect solution to reduce problems with noise including other unwanted sound in all types of indoor environments.    300mm 450mm 600mm	Frequency Table 250Hz - 0.30 315Hz - 0.35 400Hz - 0.39 500Hz - 0.40 630Hz - 0.41 800Hz - 0.42 1000Hz - 0.45 1250Hz - 0.47 1600Hz - 0.50 NRC - 0.46	Architectural Ideal for High Traffic Areas. Homes, Home Cinema Rooms, Offices, Meeting Rooms, Board Rooms Hotels, Community Halls, Restaurants Schools, Auditoriums, Courtrooms, Music studios and rehearsal spaces, auditoriums. Installation The panels are fixed directly to the wall. Installed according to manufacturer's installation guidelines. . .
FREQUENCY ABSORPTION COEFFICIENT			PHOTO	SIZE, THICKNESS AND MATERIALS	SPECIFICATIONS
			 300mm RTP-5490S 450mm RTP-5490M 600mm RTP-5490L	Recommended 300mm, 450mm and 600mm Acoustic wall panels – 20mm thick, MDF framework with various layered acoustic materials upholstered in acoustic printed fabric.	Fire Classification Class B fire (ASTM E84) Suitable for use in areas with relative humidity (up to 65%)